VIDEO SOURCE SWITCHES UN9/512 SERIES

The UN9/512 accepts two video signal inputs one of which is selected by means of relay contacts: the output is the selected input signal delayed by 0·6 μs. The UN9/512A is a single-input version.

The circuits of the UN9/512 and the UN9/512A, given in Fig. 1, include three emitter followers. The basic loss of this circuit is 7 dB.

The UN9/512 is constructed on a CH1/12A chassis with index-peg positions 3 and 22.

MJR 7/68

See overleaf for Fig. 1

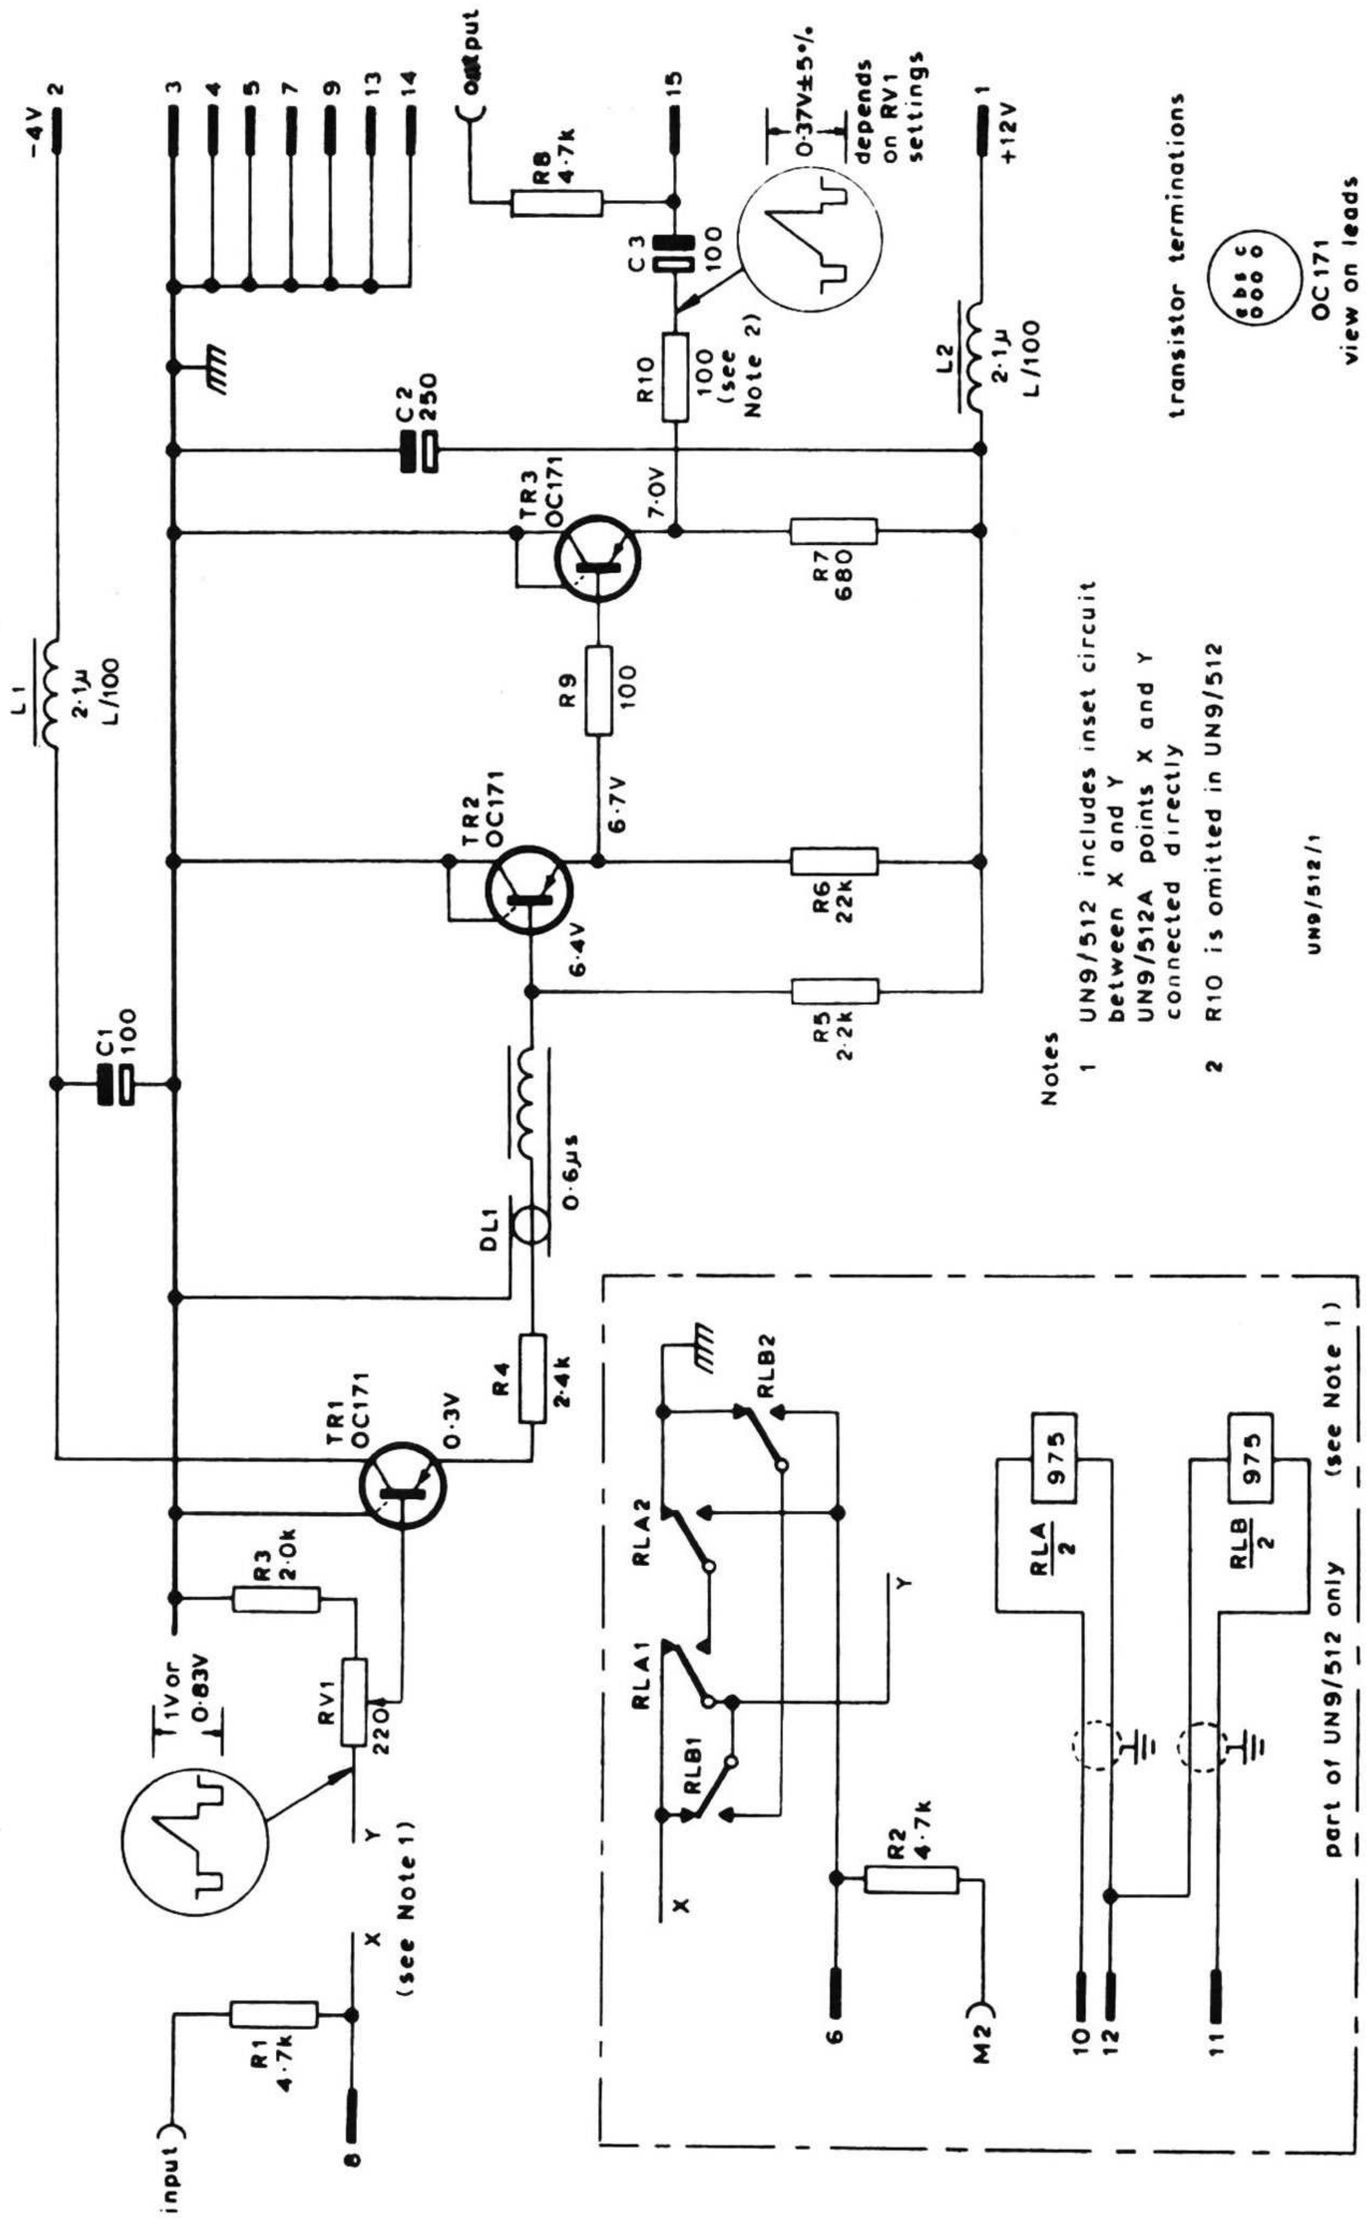


Fig. 1 Circuit of the UN9/512